




Extendable Mirror Installation Instructions

For: All Dodge Ram Trucks 1994 and Newer

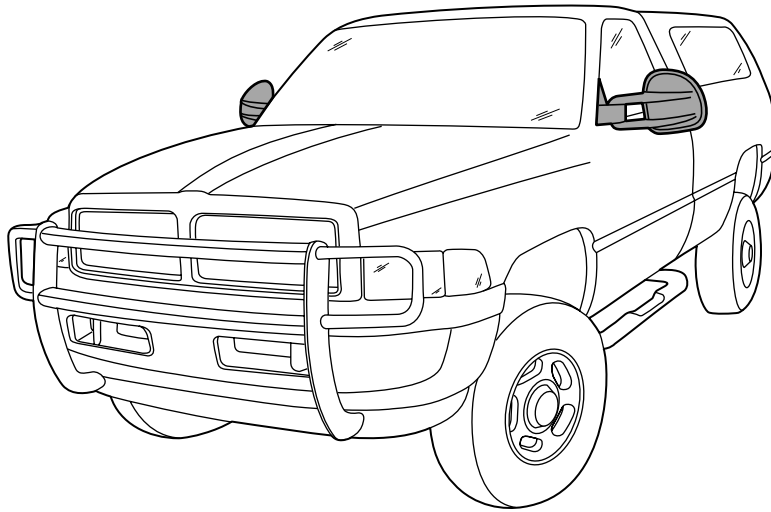

WARNING


Before you begin installing these mirrors, please read all instructions and warnings thoroughly.

These mirrors are designed to be used only on the models listed on this page.

Read and follow precisely, all instructions provided when installing this product. Failure to do so may result in a poor fit and could place driver in a potentially dangerous situation.


* Dodge	Years	Electric Right/Left	Manual Right/Left	Heated
Ram	1994-1997	73601-01	73641-01	
Ram	1998-2001	73602-01		73622-01

PARTS LIST




Driver's Side Mirror

Qty - 1




Passenger Side Mirror

Qty - 1




Spot Mirror

Qty - 2



Driver's Side Reinforcement Bracket

Qty - 1




Passenger Side Reinforcement Bracket

Qty - 1



10mm Nut

Qty - 5



Christmas Tree Clip


Qty - 4




55mm x 6mm x 10mm Hex Bolt

Qty - 1


TOOLS NEEDED




Ratchet




8mm Deep Well Socket



10mm Deep Well Socket



Phillips Screwdriver



Pliers



Bestop

STEP ONE

Loosening Trim Panel


Open the door and roll the window down completely.

Use a Phillips screwdriver to remove the top screw of the trim panel. Set the screw aside to be reused. Use pliers to remove the two top christmas tree fasteners at the front of the panel.

If you have manual windows, remove the window crank.

Remove the mirror flag door gasket.

Note: *It is not necessary to completely remove the trim panel from the door. Gently hold th top of the panel away from the door to access the mirror fastening nuts.*

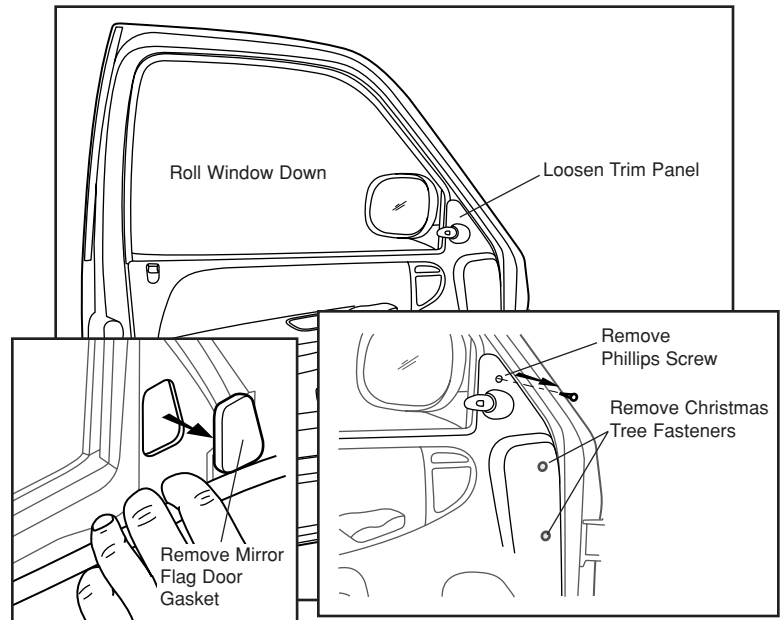


STEP TWO

Disconnecting Electrical Connector – Electric Mirrors Only

For manual mirror installation proceed to Step Three.

If you are installing an electric mirror, pull the wiring harness out of the door to access the plug. Gently pry the locking tab on the side of the plug and pull the harness away.

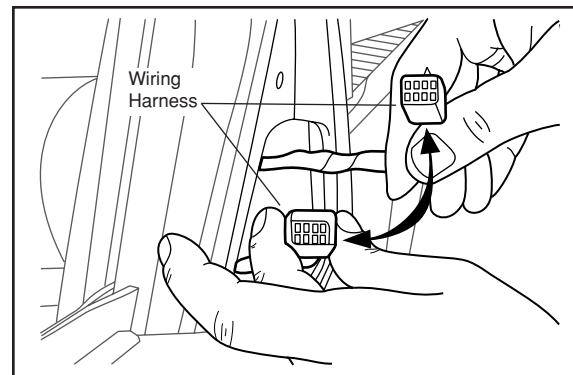


STEP THREE

Removing Factory Mirror

Use an 8mm or 10mm socket (depending on the model year of the vehicle) to remove the three nuts inside the door. Make sure not to drop loose nuts into door cavity. Slowly remove factory mirror from door by pulling it outward.

If the vehicle is equipped with an electrical harness feed it through as the mirror is removed.

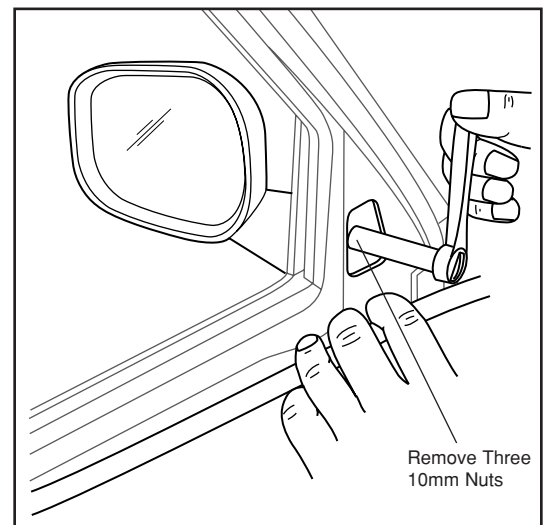




STEP FOUR

Reconnecting Electric Mirror

Clean any foreign material from sheet metal of door exterior with a clean, soft cloth.

Remove the 10mm Nuts and Reinforcement Plate from the Extendable Mirror. (The driver's side electric mirror will have two nuts and a Hex Bolt.)

If you are installing an electric mirror, feed the wiring harness through the center hole in the door. Feed wiring harness through foam gasket and reinforcement bracket. Connect the wiring harness to the plug in the door and slip the wiring into the door cavity.

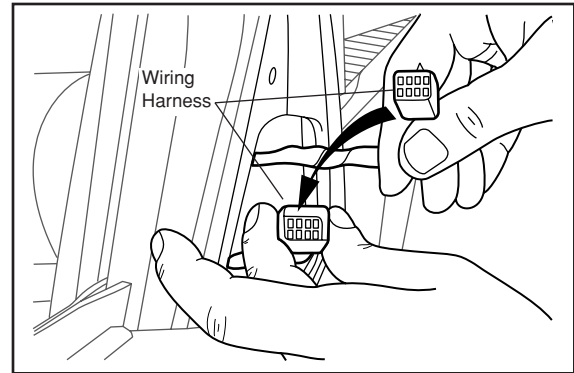


STEP FIVE

Installing Extendable Mirror

Slide the three studs on the mirror into the holes in the door. Slide the reinforcement plate onto the mirror studs. Thread a 10mm nut from the parts kit onto each stud. Once the nuts are installed on each stud, tighten them in an alternating pattern to 40 in. lbs.

Driver's Side Electric Mirror Only

Slide the two studs on the mirror into the bottom holes in the door. Slide the reinforcement plate onto the mirror studs. Thread a 10mm nut from the parts kit onto each stud. Thread the Hex Bolt from the parts kit into the top hole. Once the nuts are installed on each stud, tighten them in an alternating pattern to 40 in. lbs.

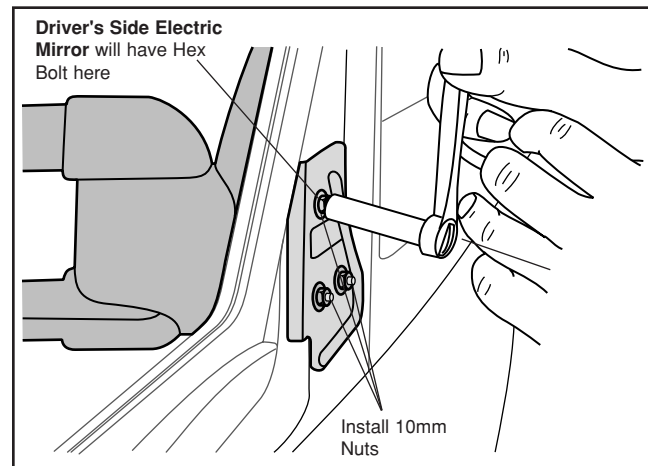

STEP SIX

Finishing Installation


Replace the trim panel and press the Christmas Tree Clips from the parts kit into position in the door. Reinstall the phillips screw removed in Step One.

STEP SEVEN

Spot Mirrors

The spot mirrors in the parts kit are backed with adhesive. Remove the protective paper from the adhesive backing. Locate the spot mirror in the desired position on the mirror and press to secure it in place.

This completes the installation of your Extendable Mirror.

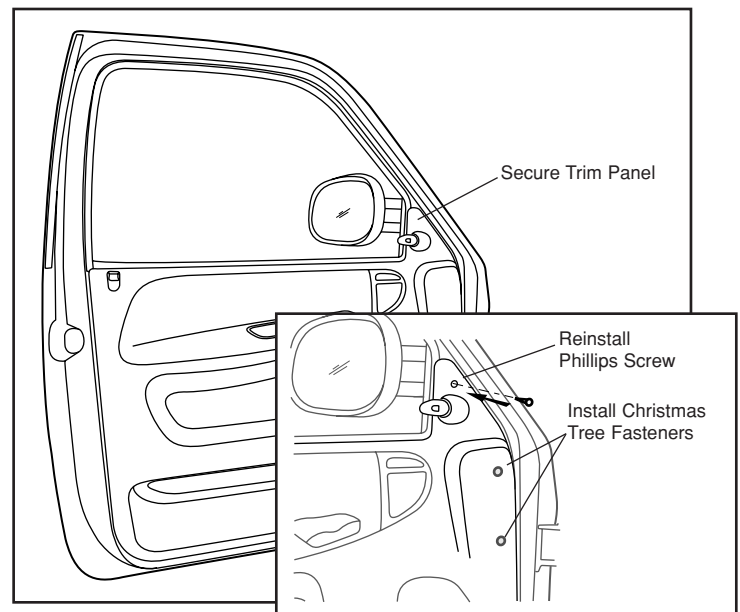



LIMITED WARRANTY

We warrant our product to be free from defects in material and workmanship, for the terms specified below, provided there has been normal use and proper maintenance. This warranty applies to the original purchaser only. All remedies under this warranty are limited to the repair or replacement of any item or items found by the factory to be defective within the time period specified.

If you have a warranty claim, first you must call our factory at the number below for instructions. You must retain proof of purchase and submit a copy with any items returned for warranty work. Upon completion of warranty work, if any, we will return the repaired or replaced item or items to you freight prepaid. Damage to our products caused by accidents, fire, vandalism, negligence, misinstallation, misuse, Acts of God, or by defective parts not manufactured by us, is not covered under this warranty.

THE WARRANTY TIME PERIOD IS AS FOLLOWS: ALL "SOFT GOODS" MANUFACTURED BY OUR COMPANY (USING PRIMARILY VINYL, PLASTICS, AND/OR FOAM): ONE YEAR FROM DATE OF PURCHASE.

ANY IMPLIED WARRANTIES OF MERCHANTABILITY AND/OR FITNESS FOR A PARTICULAR PURPOSE CREATED HEREBY ARE LIMITED IN DURATION TO THE SAME DURATION AND SCOPE AS THE EXPRESS WRITTEN WARRANTY. OUR COMPANY SHALL NOT BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGE.

Some states do not allow limitations on how long an implied warranty lasts, or the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you.

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

For further information or request for warranty work, please contact:

Bestop Inc.
Customer Service
(800)346-3910
(303)465-1755