


**Specifications
Models 44 through 80**



SPICER OFF-HIGHWAY COMPONENTS

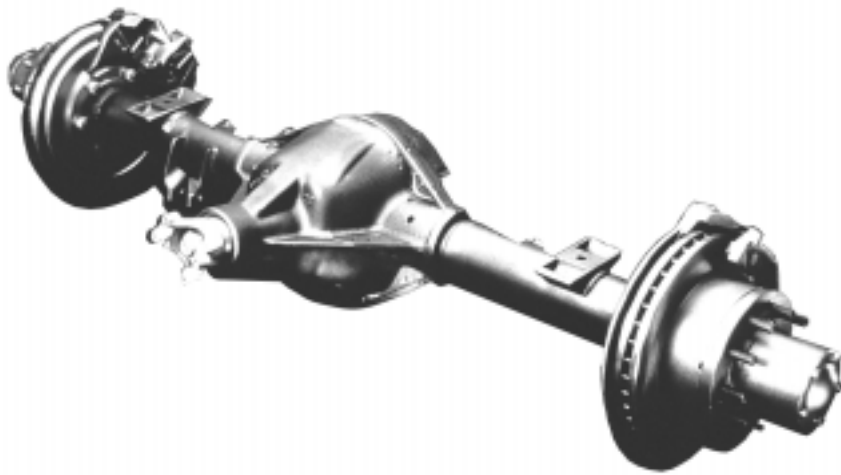

STANDARD MODELS

RIGID DRIVE AXLES

AXLE MODEL	CARRY CAPACITY		BRAKE TYPE	RING GEAR DIAMETER		MAXIMUM OUTPUT TORQUE		CONTINUOUS OUTPUT TORQUE	
	Lbs.	Kg.		In.	Mm.	Lb.-Ft.	Kgm	Lb.-Ft.	Kgm
44SF	3,300	1500	DRUM	8.50	215.90	4,400	610	1,100	150
60SF	4,200	1910	NONE	9.75	247.65	6,000	830	1,500	210
60FF	5,900	2680	DRUM	9.75	247.65	6,000	830	1,500	210
70B	7,500	3400	DRUM	10.50	266.70	7,000	970	1,750	240
70HD	10,000	4540	DISC	10.50	266.70	7,000	970	1,750	240
70HD/OS	10,000	4540	DISC	10.50	266.70	7,000	970	1,750	240
80	11,500	5220	DISC	11.00	279.40	10,000	1380	2,500	350

DRIVE STEER AXLES

AXLE MODEL	CARRY CAPACITY		BRAKE TYPE	RING GEAR DIAMETER		MAXIMUM OUTPUT TORQUE		CONTINUOUS OUTPUT TORQUE	
	Lbs.	Kg.		In.	Mm.	Lb.-Ft.	Kgm	Lb.-Ft.	Kgm
44F	3,300	1500	DISC	8.50	215.90	4,400	610	1,100	150
60F	4,300	1950	DISC	9.75	247.65	6,000	830	1,500	210
70BF	5,700	2590	DISC	10.50	266.70	7,000	970	1,750	240

STEERING NON-DRIVE AXLES

AXLE MODEL	CARRY CAPACITY		BRAKE TYPE	RING GEAR DIAMETER		MAXIMUM OUTPUT TORQUE		CONTINUOUS OUTPUT TORQUE	
	Lbs.	Kg.		In.	Mm.	Lb.-Ft.	Kgm	Lb.-Ft.	Kgm
44DF	3,300	1500	DISC	NA	NA	NA	NA	NA	NA
70DF	5,700	2590	DISC	NA	NA	NA	NA	NA	NA

RIGID INDEPENDENT CARRIERS

AXLE MODEL	CARRY CAPACITY		BRAKE TYPE	RING GEAR DIAMETER		MAXIMUM OUTPUT TORQUE		CONTINUOUS OUTPUT TORQUE	
	Lbs.	Kg.		In.	Mm.	Lb.-Ft.	Kgm	Lb.-Ft.	Kgm
44IC	3,500	1590	NONE	8.50	215.40	4,400	610	1,100	150
70IC	7,000	3180	NONE	10.50	266.70	7,000	970	1,750	240

APPLICATION POLICY

Capability ratings, features and specifications vary depending upon the model type of service. Application approvals must be obtained from Spicer Off-Highway Products Division. We reserve the right to change or modify our product specifications, configurations, or dimensions at any time without notice.



SPICER OFF-HIGHWAY PRODUCTS DIVISION

1293 Glenway Drive

Statesville, NC 28625

Tel: (704) 873-2811 Fax: (704) 878-5616